



**PLAN**

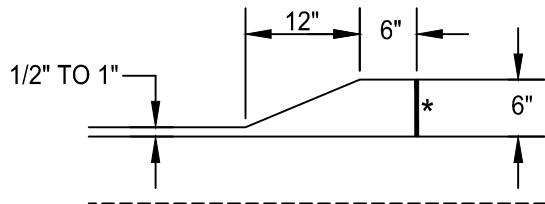

**SECTION B-B**

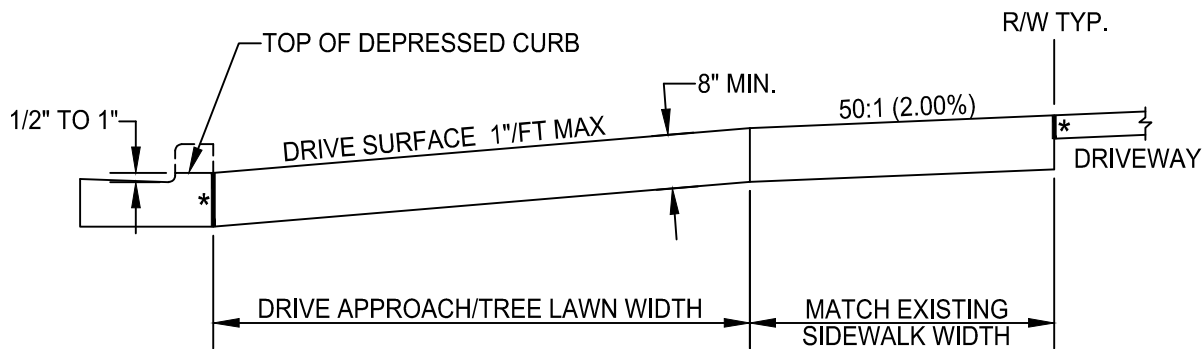

**SECTION A-A**

**NOTES**

1. MAXIMUM JOINT SPACING SHALL BE 12 FEET LONGITUDINALLY AND TRANSVERSELY.
2. 3" OF GRAVEL SHALL BE PLACED UNDER DRIVE APPROACHES IF DETERMINED NECESSARY BY THE ENGINEER.
3. ALL CONCRETE SHALL BE ODOT CLASS "C". THE CONTRACTOR SHALL PROVIDE A BROOM FINISH AND EDGING TO ALL EXPOSED SURFACES.
4. WHERE ASPHALT CONCRETE PAVEMENT IS DISTURBED, THE ASPHALT SHALL HAVE A SAWED EDGE, BE REPLACED AND SEALED AS DIRECTED BY THE ENGINEER.
5. SAW CUT CURBS AT BOTH ENDS. SAW CUT SHALL HAVE CLEAN AND STRAIGHT EDGES, AND SHALL BE THE FULL DEPTH OF THE CURB. HORIZONTAL CURB SAW CUTS TO PRODUCE DROP CURB IS PROHIBITED.
6. VINYL EXPANSION JOINT MATERIAL SHALL BE PLACED AS SHOWN.



*City of Beavercreek*  
*Standard Construction Drawing*  
**COMMERCIAL SERVICE DRIVE APPROACH**

DETAIL	DRIVE
SECTION	RW-107